




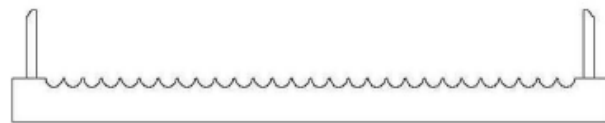


2.54 mm IDC Socket

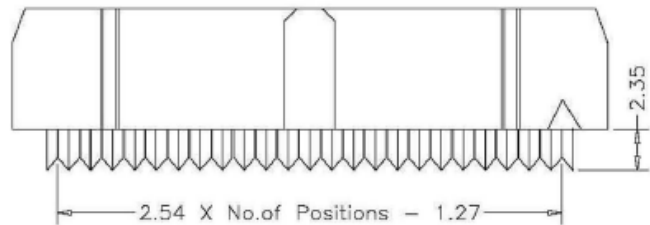

SPECIFICATIONS

- Current Rating : 3AMP
- Operation Temperature: -40°C to +105°C
- Contact Resistance : 20mΩ Max.
- Insulation Resistance: 1000MΩ Min.
- Withstand Voltage : AC 1000V
- Insulator Material : Polyester(UL94V-0)
Standard: PBT
- Contact Material : Brass
- Contact plating : Au or Sn over 50u*
Ni

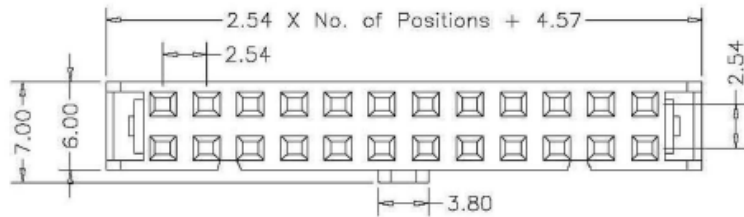

A.u.S. SPIELGERATE GMBH
 SCHEYDGASSE 48, AT 1210 WIEN
 ☎ +43 (0) 1 271 66 00 65 FAX +43 (0) 1 271 66 00 75
 🌐 www.aus.at ✉ verkauf@aus.at

RoHS Compliant 玄茂科技股份有限公司

APPD. 核准 Angel	SCALE 比例 参考	TOLERANCE X: ±0.35 X.X: ±0.25 X.XX: ±0.20 X.XXX: ±0.15	PART NAME 品名 IDC SOCKET 2.54mm X 2.54mm XXP WITH S/R WITH BUMP BLACK INSULATOR ROHS
DWG. 製圖 Yumi			
DATE 制表日 2009/07/09	UNIT 單位 MM	SIZE 紙張尺寸 A4	PART NO. 料號
PAGE 張數 1 OF 1	REV. 版本 A		